

Somfy's 40mm Motor Range

This document is a presentation of accessories and specifications related to the Sonesse® 40, Altus® 40 RTS, and LS 40 Wired motors. It provides the technical information needed to order, fabricate, and sell the complete range of Somfy's 40 mm motors. For additional information regarding any of the products in this document including motors, power sources, controls, interfaces, etc., please reference www.somfysystems.com where detailed instructions are available for download.

Conveniently Quiet - Sonesse® 40


The Sonesse® 40 Range with patent pending technology features a newly designed brake, rotor and gearbox to further reduce motor operating sound. Available in Zigbee, PoE, RS485, WT, and RTS technologies, the Sonesse 40 can be used in a variety of interior window covering applications.

Power, Simplicity, and Convenience - Altus® 40 (RTS)

The Altus® 40 RTS features an integrated radio receiver within the motor which eliminates any wiring between the motor and controls. Available in two torques 4Nm and 9Nm, the Altus 40 RTS is ideal for exterior product applications.

Proven Strength and Reliability – LS 40 (Wired)

The LS 40 motor is Somfy's original 40 mm solution. This robust and durable motor is available in a wide variety of torques and speeds and is a dependable source for exterior applications.

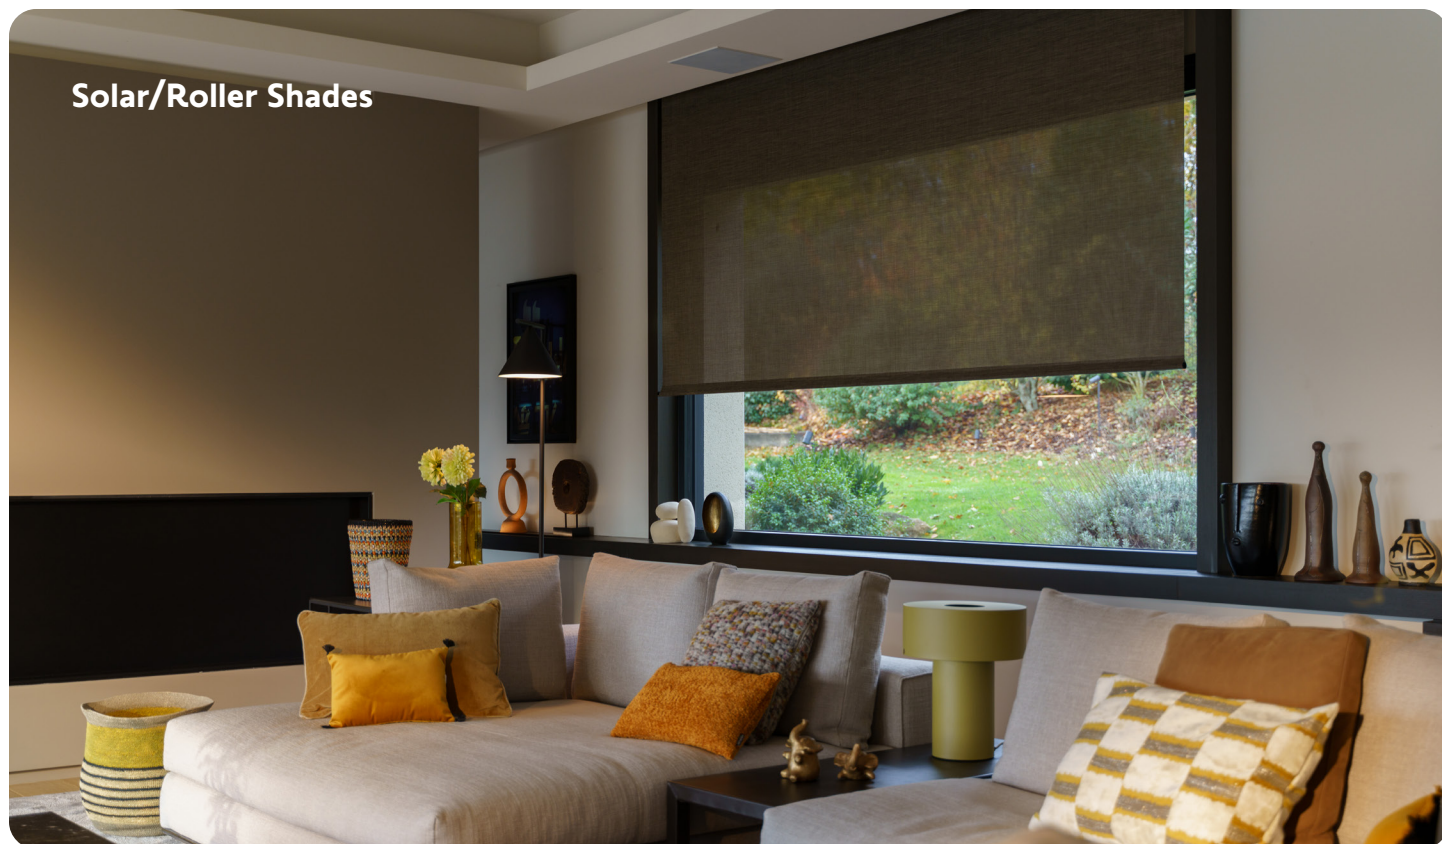



Sheer Horizontal Shades



Globally adopted IoT control solution



Roman/Woven Shades



Low-voltage control utilizing CAT-5e



Horizontal Blinds



Commercial Building Control



Awnings



Offers control via standard AC switching



Rolling Shutters



Radio Technology Somfy® (RTS) allows wireless radio control



Exterior Solar Screens



As with all Somfy products, motors are backed by a 5 year warranty

Sonesse® 40

Designed to set the new acoustic standard.

The most compact, adaptable and quiet 40 mm AC motor dedicated to interior window coverings.

The Sonesse® 40 range features 4 patents pending that reduce motor operating sound. The brake, rotor, and gearbox are all specially designed to absorb sources of noise. It motorizes a variety of applications, and available in multiple technologies. Somfy offers a full range of compatible controls and accessories.

SOMFY DESIGNED FOR SILENCE - Quietness Scale





Somfy
DESIGNED FOR
SILENCE

The Sonesse® range of motors are rated according to their quietness. The volume scale below appears on all Sonesse range specification pages and designates the motor's level of sound output.




Situo 5 Variation RTS
Hand-held Remote

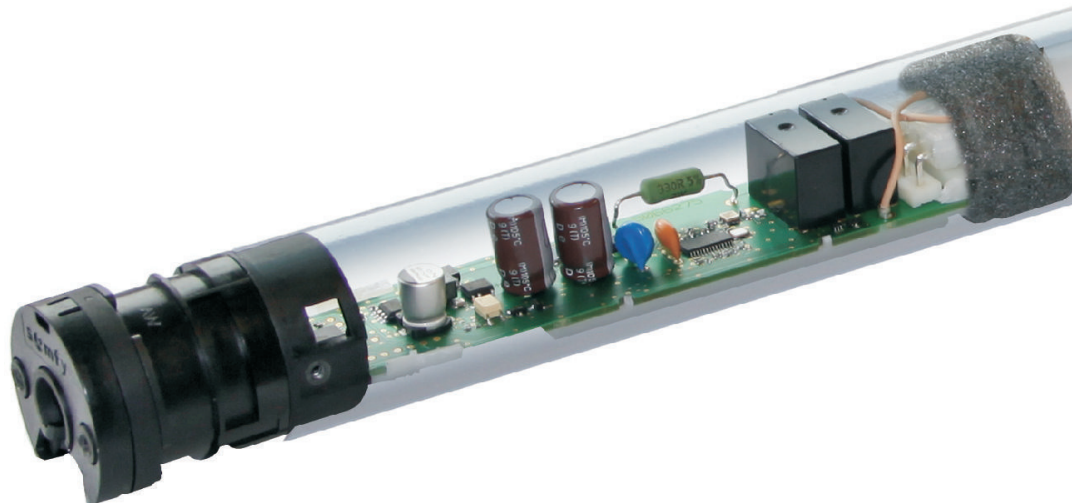


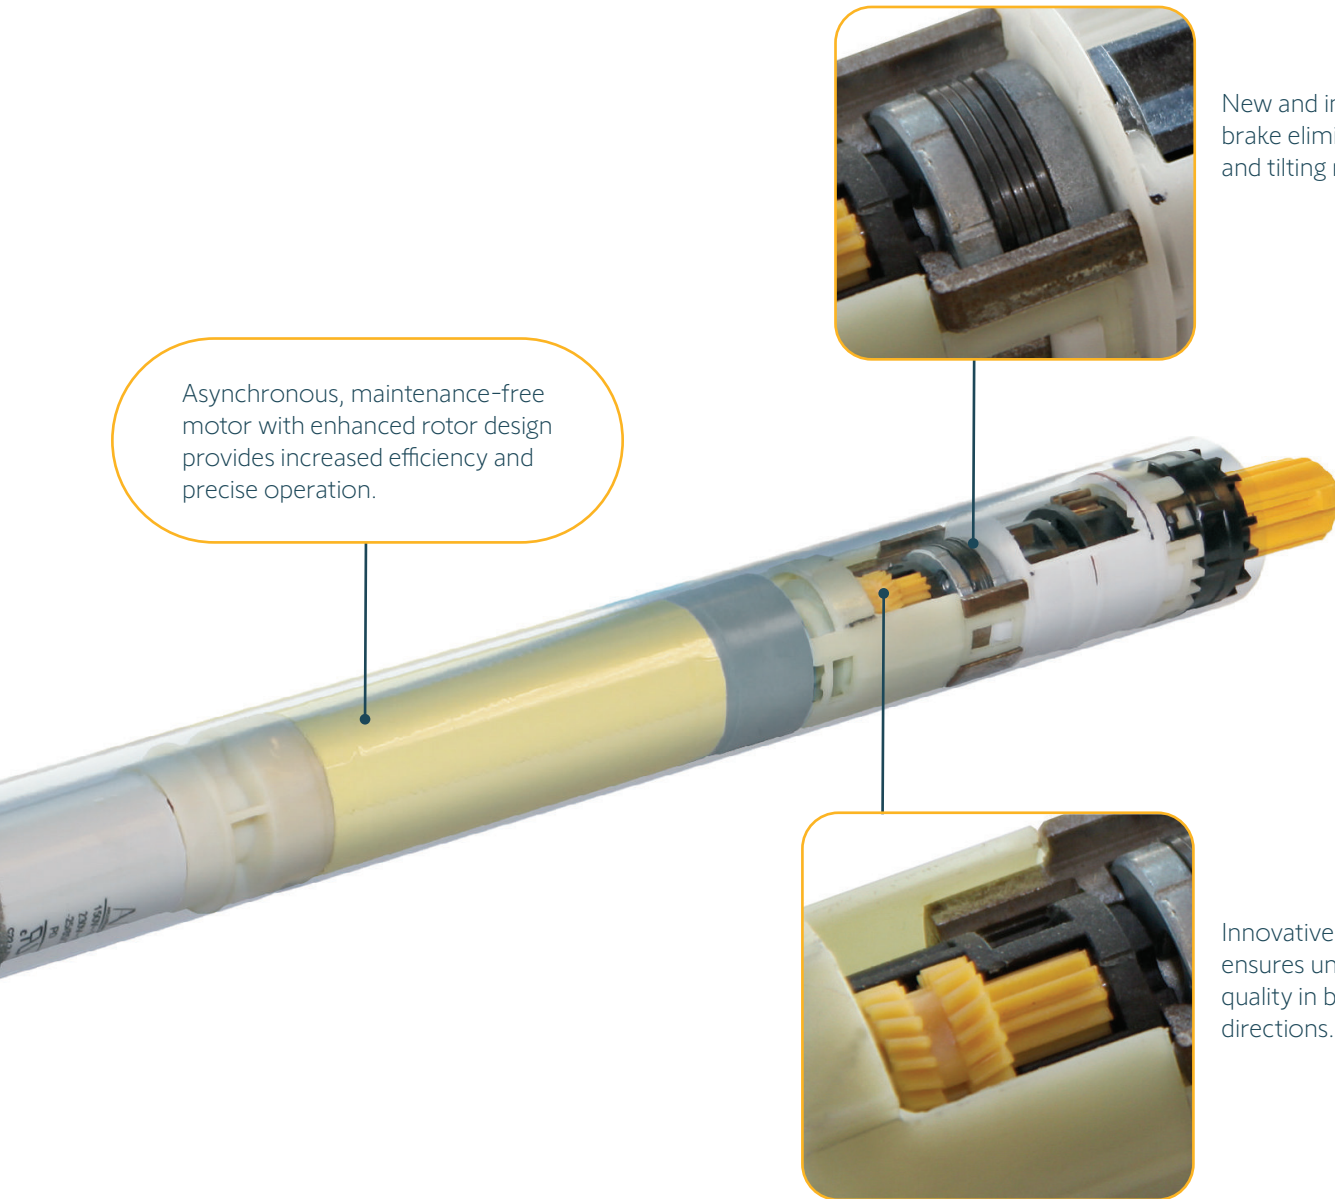

Asynchronous, maintenance-free motor with enhanced rotor design provides increased efficiency and precise operation.

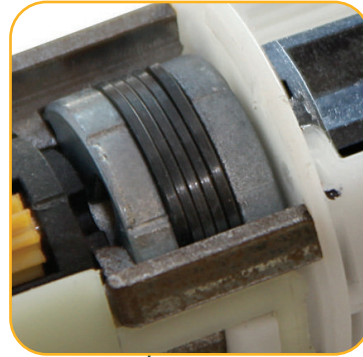

New and improved spring brake eliminates stopping and tilting noise.

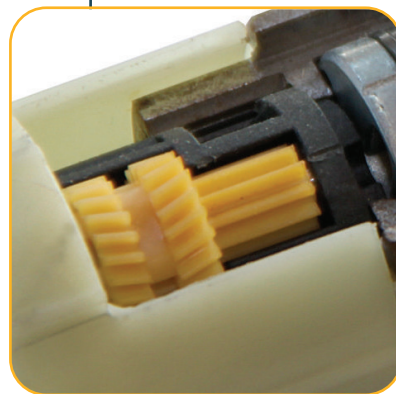

Innovative helical gearbox ensures uniform sound quality in both up and down directions.

Sonesse® 40 AC Zigbee

Item #: 1245920 Sonesse® 40 Zigbee 404S2 with Fast Connector
 Item #: 1245921 Sonesse® 40 Zigbee 406A2 with Fast Connector
 Item #: 1245922 Sonesse® 40 Zigbee 409R2 with Fast Connector



Somfy
DESIGNED FOR
SILENCE




Technical Features

Voltage Supply	120V/60Hz AC
Index Protection Rating	IP 31 (for indoor use only)
Limit Switch Type	Electronic
Limit Switch Capacity	250 turns
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class II
Thermal Protection	4 minutes
Repeatability	+/- 4°

Antenna 6.9 in. (17.5cm) wire length, must not be cut or lengthened. For greatest RF range, antenna must be out of the rail/tube/cassette.

Dimensions

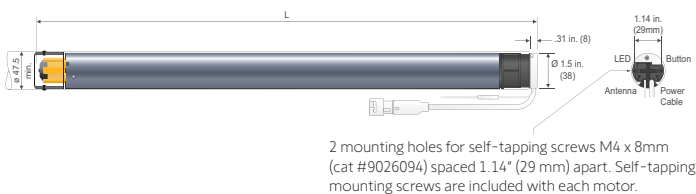

Specifications

Torque (Nm)	4	6	9
Speed (rpm)	36	24	14
Motor Length (L) in./mm	20.2 in. (514mm)	21.5 in. (545mm)	
Rated Current (Amp)	0.79	1	1
Radio Frequency	2.4 GHz		
Radio Protocol	Zigbee 3.0 / Bluetooth 4.2		
Stand By Consumption (W)	0.5		
Sound Level dB(A)*	42	44	40

*Sound level:

Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Inside Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (#9147894) is recommended to prevent noise and drive wheel separation from motor shaft.

Optional Head Covers



Optional Grey
#9026091



Optional Black
#9026092



White
(supplied with motor)
#9026090

Applications



Roller shades



Roman shades



Woven woods



Pleated shades*



Cellular shades*



Layered/
Zebra shades*



Projection
screens



Horizontal
blinds*

*Using CTS40

Main Functionalities



Designed for silence



Position feedback



Openness of the Zigbee
protocol



Quick & easy settings



Mesh network router



"my" function



Tilting



Works with
Apple Home

Integrated Motor Plates (sold separately)

9025997	Sonesse 40 Motor Plate Rollease R16-24 15.9 x 1.8mm & screws	
9026000	Sonesse 40 Motor Plate Rollease RBGAL 16 x 3.2mm & screws	
9025996	Sonesse 30 Motor Plate Rollease 360 R3-R8 10 x 1.8mm and screws	
9025999	Sonesse 30 Motor Plate Acmeda 12mm and screws	
9026003	Sonesse 30 Motor Plate Rollease Skyline and screws	
9026093	Sonesse 30 Motor Plate M3 x 6mm Philips flat-head plastite screw	

Cables

Cable type: White 2-conductor SVT 2 - AWG 18 : 0.824 mm² / Fast Connector 7.9 in. (20cm)



Certifications



Sonesse® 40 PoE


Item #: 1241426 Sonesse 40 PoE at 2/25 Type 2 (30W)
 Item #: 1241427 Sonesse 40 PoE bt 4/25 Type 3 (45W)
 Item #: 1241428 Sonesse 40 PoE bt 6/25 Type 3 (60W)



Technical Features

Voltage Supply & Tolerance	48V DC (42.5V DC – 57V DC)
Thermal run time	5 minutes
Repeatability	+/- 5°
Index Protection Rating	IP30 (interior use only)
Limit Switch Unit	Electronic
Temperature Working Range	From 32°F to 140°F (0°C to 60°C)
Insulation Class	Class III
Max Distance from Power Source	328 ft. (100m)

Dimensions

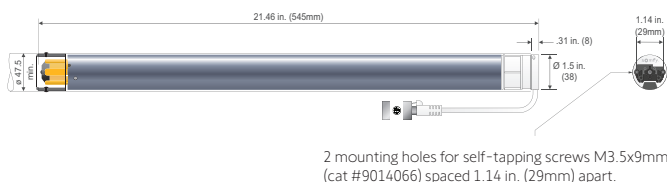

Specifications

Nominal Torque (Nm)	2	4	6
Power Supply** (IEEE 802.3bt)	Type 2 (30W)	Type 3 (45W)	Type 3 (60W)
Nominal Speed (rpm)	25		
Rated Power (W)	25	51	62
Protocol	Somfy Synergy™ API, CoAP		
Security	Certificate + PIN code to secure TCP/TLS AES-128 encryption over UDP		
Stand By Consumption (W)	<1 W		
Sound Level dB(A)*	41	42	47

*Sound level:

Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/end product.

** For optimization of the power budget, LLDP must be disabled at the Power Sourcing Equipment (PSE). If LLDP is required for your commercial project, please consult your Somfy representative.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor
- Inside Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (#9147894) is recommended to prevent noise and drive wheel separation from motor shaft.

Applications



Roller shades



Roman shades



Layered/
Zebra shades*



Sheer horizontals



Horizontal blinds*



Projection screens

Main Functionalities



Designed for silence



Thin head



Adjustable speed



Built-in speed control



Position feedback



LED provides feedback on motor



Motor unique identifier



Soft start and soft stop

Integrated Motor Plates (sold separately)

9025997	Sonesse 40 Motor Plate Rollease R16-24 15.9 x 1.8mm & screws	
9026000	Sonesse 40 Motor Plate Rollease RBGAL 16 x 3.2mm & screws	
9025996	Sonesse 30 Motor Plate Rollease 360 R3-R8 10 x 1.8mm and screws	
9025999	Sonesse 30 Motor Plate Acmeda 12mm and screws	
9026003	Sonesse 30 Motor Plate Rollease Skyline and screws	
9026093	Sonesse 30 Motor Plate M3 x 6mm Philips flat-head plastite screw	

Motor Pigtail Cable

CAT-5e SF/UTP — RJ45 7.5 in. (19cm) pigtail with RJ45 shielded female to female coupler, #9028957



Wiring Recommendations:

Somfy recommends using a basic Cat-5e cable or greater. Please consult your Somfy representative for any wiring questions.

Sonesse® 40 RS485

Item #: 1240562 Sonesse® 40 RS485 404S2 with Fast Connector
 Item #: 1240563 Sonesse® 40 RS485 406A2 with Fast Connector
 Item #: 1240564 Sonesse® 40 RS485 409R2 with Fast Connector




Somfy
DESIGNED FOR
SILENCE



Technical Features

Voltage Supply	120V/60Hz AC
Index Protection Rating	IP 31 (for indoor use only)
Limit Switch Type	Electronic
Limit Switch Capacity	250 turns
Temperature Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Class II
Thermal Protection	4 minutes
Repeatability	+/- 4°

Dimensions

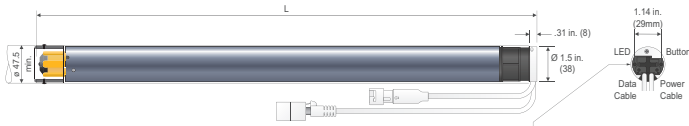

2 mounting holes for self-tapping screws M4 x 8mm (cat #9026094) spaced 1.14" (29 mm) apart. Self-tapping mounting screws are included with each motor.

Specifications

Torque (Nm)	4	6	9
Speed (rpm)	36	24	14
Motor Length (L) in./mm	20.2 in. (514mm)	21.5 in. (545mm)	
Rated Current (Amp)	0.95		
Stand By Consumption (W)	0.5		
Sound Level dB(A)*	42	44	40

*Sound level:

Power Level: according to standards ISO3741 in dB(A) ref 1pW typical value, at nominal torque and nominal speed, without application/end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor
- Inside Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (#9147894) is recommended to prevent noise and drive wheel separation from motor shaft.

Optional Head Covers



Optional Grey
#9026091



Optional Black
#9026092



White
(supplied with motor)
#9026090

Applications



Roller shades



Pleated shades*



Roman shades



Horizontal blinds*



Layered/Zebra shades*



Projection screens

Main Functionalities



Designed for silence



Thin head



LED provides feedback on motor



Easy limit setting



Position feedback



Motor unique identifier

Integrated Motor Plates (sold separately)


9025997	Sonesse 40 Motor Plate Rollease R16-24 15.9 x 1.8mm & screws	
9026000	Sonesse 40 Motor Plate Rollease RBGAL 16 x 3.2mm & screws	
9025996	Sonesse 30 Motor Plate Rollease 360 R3-R8 10 x 1.8mm and screws	
9025999	Sonesse 30 Motor Plate Acmeda 12mm and screws	
9026003	Sonesse 30 Motor Plate Rollease Skyline and screws	
9026093	Sonesse 30 Motor Plate M3 x 6mm Philips flat-head plastite screw	

Cables

Cable type: White 2-conductor
 SVT 2 - AWG 18 : 0.824 mm² /
 Fast Connector 7.9 in. (20cm)



Cable type: white 11.8 in. (30cm) RJ45 male with
 RJ45 Female/Female coupler part# 9026095

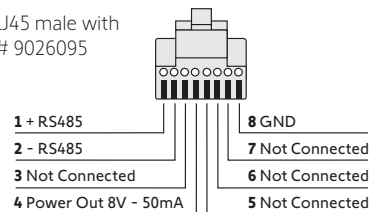

Certifications



Sonesse® 40 WT

404S2 1240377 409R2 1240379
406A2 1240378



Somfy
DESIGNED FOR
SILENCE




Offers control via
power switching


Technical Features

Voltage Supply	120V AC	Limit Switch Capacity	40 Turns
Index Protection Rating (interior use only)	Motor: IP 44 Fast Connector: IP55	Temperature Working Range	32°F to 140°F (0°C to 60°C)
Limit Switch Type	Progressive Adjustment (PA)	Insulation Class	Class 1 for 120V AC

Dimensions

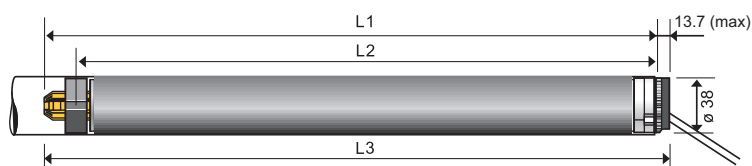

NOTE: Illustration dimensions in millimeters (mm).



2 mounting holes for self tapping screws. Dia. 4 mm (cat #100405B)
Depth 9 mm spaced 1.14" (29 mm) apart.
Self tapping mounting screws are included with each motor.

	404S2	406A2	409R2
L1	18.19 in. (462 mm)	19.45 in. (494 mm)	19.45 in. (494 mm)
L2	17.36 in. (441 mm)	18.62 in. (473 mm)	18.62 in. (473 mm)
L3	18.82 in. (478 mm)	20.08 in. (510 mm)	20.08 in. (510 mm)
Cable Length	1.6 ft (.5 m) to Fast Connector		

Certifications



Specifications

	404S2	406A2	409R2
Torque	4 Nm	6 Nm	9 Nm
Nominal Voltage	120V / 60Hz		
Rated Current	.95A		
Speed	36 rpm	24 rpm	14 rpm
Thermal Protection	4 minutes		
*Sound Level	42 dBA	44 dBA	40 dBA

*Sound level:

*According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free plays have to be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (9147894) is recommended to prevent noise and drive wheel separation from motor shaft.



Type of power cable

Wired

120V AC / 60Hz

4-Conductor 1.6 ft. SJTW Cable on
Motor with Fast Connector



Extension Cable (sold separately)



4 Conductor Fast Connector

Extension Cable with Open Leads

9021117	4.4 ft.
9021118	8.4 ft.
9021120	16.4 ft.
9021121	22.4 ft.

Sonesse® 40 RTS

404S2 1240380 409R2 1240382
406A2 1240381



Somfy
DESIGNED FOR
SILENCE




Offers control via Radio
Technology Somfy® (RTS)


Technical Features

Voltage Supply	120V AC	Temperature Working Range	32°F to 140°F (0°C to 60°C)
Index Protection Rating (interior use only)	Motor: IP 44 Fast Connector: IP55	Insulation Class	Class 1 for 120V AC
Limit Switch Type	Electronic (RTS)	Antenna	Integrated into power cord. Power cord must be at least 12 inches and must not come in contact with metal.
Limit Switch Capacity	200 Turns		

Dimensions

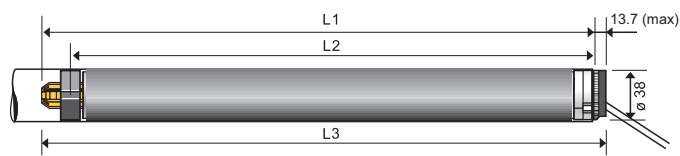

NOTE: Illustration dimensions in millimeters (mm).



2 mounting holes for self tapping screws. Dia. 4 mm (cat #100405B)
Depth 9 mm spaced 1.14" (29 mm) apart.

Self tapping mounting screws are included with each motor.

	404S2	406A2	409R2
L1	19.96 in. (507 mm)	21.18 in. (538 mm)	21.18 in. (538 mm)
L2	19.00 in. (483 mm)	20.24 in. (514 mm)	20.24 in. (514 mm)
L3	20.5 in. (520 mm)	21.69 in. (551 mm)	21.69 in. (551 mm)
Cable Length	1.6 ft (.5 m) to Fast Connector		

Certifications



Specifications

	404S2	406A2	409R2
Torque	4 Nm	6 Nm	9 Nm
Nominal Voltage	120V / 60Hz		
Rated Current	.95A		
Speed	36 rpm	24 rpm	14 rpm
Thermal Protection	4 minutes		
Radio Frequency	433.42 MHz		
*Sound Level	42 dBA	44 dBA	40 dBA

Sound level:

*According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free plays have to be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (9147894) is recommended to prevent noise and drive wheel separation from motor shaft.



Type of power cable


RTS

120V AC / 60Hz

3-Conductor 1.6 ft. SJTW Cable on
Motor with Fast Connector



Extension Cable (sold separately)

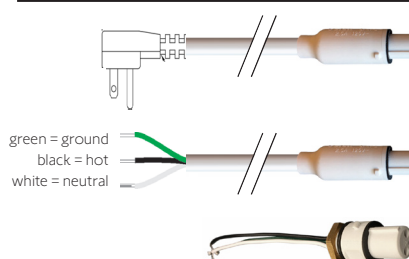

3 Conductor Fast Connector Extension Cable with NEMA Plug (RTS & RS485)

9021113	1.4 ft.	9021114	4.4 ft.
9021115	8.4 ft.	9020791	10.4 ft.
9020792	18 ft.	9020793	24 ft.

3 Conductor Fast Connector Extension Cable with Open Leads or No NEMA

9021157	8.4 ft.
---------	---------

3 Conductor Panel Mount Female Fast Connector for direct connection to J-Box

9026398	Panel Mount Female Fast Connector
---------	-----------------------------------

LS 40 WT

412R2 1024192




Offers control via power switching

Technical Features

Voltage Supply	120V AC	Limit Switch Capacity	40 Turns
Index Protection Rating	IP 44	Temperature Working Range	32°F to 140°F (0°C to 60°C)
Limit Switch Type	Progressive Adjustment (PA)	Insulation Class	Class 1 for 120V AC

Dimensions

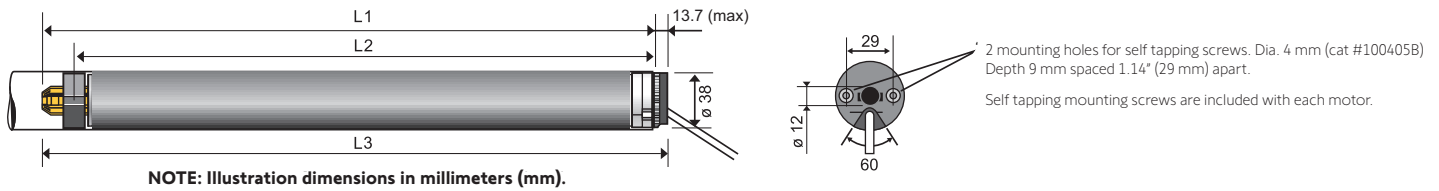

	404S2	404R2	409R2	412R2
L1	18.46 in. (469 mm)	18.46 in. (469 mm)	18.46 in. (469 mm)	18.46 in. (469 mm)
L2	17.64 in. (448 mm)	17.64 in. (448 mm)	17.64 in. (448 mm)	17.64 in. (448 mm)
L3	19.09 in. (485 mm)	19.09 in. (485 mm)	19.09 in. (485 mm)	19.09 in. (485 mm)
Cable Length	6.5 ft (2 m)			

Specifications

	404S2	404R2	409R2	412R2
Torque	4 Nm	4 Nm	9 Nm	12 Nm
Nominal Voltage	120V / 60Hz			
Rated Current	.95A	.85A	1.05A	1.05A
Speed	36 rpm	18 rpm	18 rpm	10 rpm
Thermal Protection	5 minutes			
*Sound Level	57 dBA	57 dBA	54 dBA	54 dBA

*Sound level:


*According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free plays have to be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (9147894) is recommended to prevent noise and drive wheel separation from motor shaft.

Type of power cable

Wired
120V AC / 60Hz
4-Conductor Cable



white = neutral
red = direction 1
black = direction 2
green = ground

Certifications



Altus® 40 RTS

404S2 1240260 409R2 1240261



Somfy
DESIGNED FOR
SILENCE




Offers control via Radio
Technology Somfy® (RTS)


Technical Features

Voltage Supply	120V AC	Temperature Working Range	14°F to 104°F (-10°C to 40°C)
Index Protection Rating	Motor: IP 44 Fast Connector: IP55	Insulation Class	Class 1 for 120V AC
Limit Switch Type	Electronic (RTS)	Antenna	Integrated into power cord. Power cord must be at least 12 inches and must not come in contact with metal.
Limit Switch Capacity	200 Turns		

Dimensions

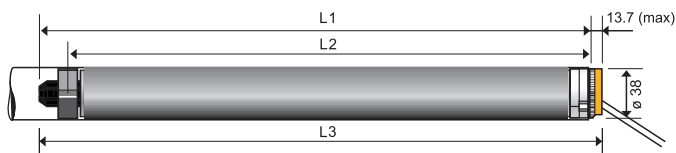

NOTE: Illustration dimensions in millimeters (mm).



2 mounting holes for self tapping screws. Dia. 4 mm (cat #100405B)
Depth 9 mm spaced 1.14" (29 mm) apart.

Self tapping mounting screws are included with each motor.

	404S2	409R2
L1	20.08 in. (510 mm)	20.87 in. (530 mm)
L2	19.13 in. (486 mm)	19.92 in. (506 mm)
L3	20.59 in. (523 mm)	21.38 in. (543 mm)
Cable Length	1.6 ft (.5 m) to Fast Connector	

Certifications



Specifications

	404S2	409R2
Torque	4 Nm	9 Nm
Nominal Voltage	120V / 60Hz	
Rated Current	.95A	1.05A
Speed	36 rpm	18 rpm
Thermal Protection	5 minutes	
Radio Frequency	433.42 MHz	
*Sound Level	57 dBA	54 dBA

Sound level:

*According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free plays have to be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > or = 38mm must be respected to prevent contact with the basic motor tube.
- 400 Series Drive Stop and Screw (9147894) is recommended to prevent noise and drive wheel separation from motor shaft.

Type of power cable


RTS

120V AC / 60Hz

3-Conductor 1.6 ft. SJTW Cable on
Motor with Fast Connector



Extension Cable (sold separately)

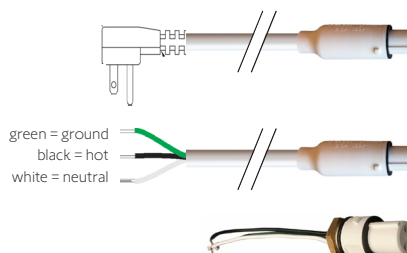

3 Conductor Fast Connector Extension Cable with NEMA Plug (RTS & RS485)

9021113	1.4 ft.	9021114	4.4 ft.
9021115	8.4 ft.	9020791	10.4 ft.
9020792	18 ft.	9020793	24 ft.

3 Conductor Fast Connector Extension Cable with Open Leads or No NEMA

9021157	8.4 ft.
---------	---------

3 Conductor Panel Mount Female Fast Connector for direct connection to J-Box

9026398	Panel Mount Female Fast Connector
---------	-----------------------------------

Controls

Zigbee® Technology

TaHoma® switch



TaHoma® switch
1871037
TaHoma® switch
(with ethernet adaptor)
1871038



TaHoma® switch
Ethernet Adaptor
9028054

Smart Plug



Smart Plug Zigbee
1871217



DecoFlex WireFree™ Wall Switches



DecoFlex WireFree™ Zigbee,
White 2 Channel
Surface-mount
1871577
In-wall
1871573



DecoFlex WireFree™ Zigbee,
White 4 Channel
Surface-mount
1871576
In-wall
1871572

Ysia®



Ysia® 1 Zigbee
1871153



Ysia® 5 Zigbee
1871154



Ysia® 5 Variation Zigbee
1871281

Integration Accessories

Somfy Connect™ Universal Automation Interface (UAI) Plus



The Somfy Connect™ Universal Automation Interface (UAI) Plus allows for commissioning and integrating Somfy Digital Network™ (SDN) over IP.

1870272

Somfy Connect™ BMS Interface



Provides communication between building management systems and SDN motorized shading systems.

1871168




Controls

Somfy Digital Network™ (SDN) RS485



Surface-mount Power Panel

Rack-mount Power Panels

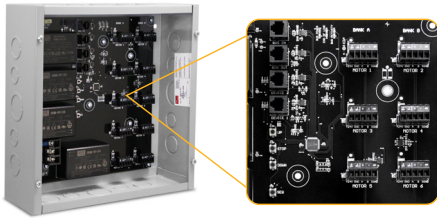

SDN PowerConnect™ Surface-Mount Panel

This Power Panel is an SDN bus distribution component used to add 10 isolated motor ports and two isolated device ports to an SDN bus segment.

1871026



SDN PowerConnect™ Rack-Mount Panel

This Power Panel is an SDN bus distribution device used to add eight isolated motor ports and two isolated device ports to an SDN bus segment per panel.

Single Kit: 1871027

Dual Kit: 1871312

Data Panel

Data Hub V2

Bus & Sensor Station Power Supply



The Data Panel is a bus distribution component used to start or grow a Somfy Digital Network™ (SDN) system. This device adds 4 isolated bus segments to an SDN system.

1870260



The Data Hub V2 is a Somfy Digital Network™ (SDN) bus distribution component which adds 5 device ports to an SDN Bus line.

1870951



The Somfy Bus and Sensor Station Power Supply provides 24V DC power to the SDN bus. Each Power Supply can provide power to up to 100 bus line devices (excluding motors).

1822440

SDN 0-10V Interface

RTS Receiver for SDN and animeo® IP



SDN 0-10V Interface V2

The 0-10V Interface is a Somfy Digital Network™ (SDN) device which receives industry standard 0-10V control input to operate SDN RS485 motors.

1870857



RTS Receiver for SDN V2

The RTS Receiver for SDN V2 allows RTS transmitters to control SDN groups as part of a stand-alone SDN system. It connects to any device port on the SDN bus for both power and communication.

1871471

RTS Receiver for animeo® IP V2

The RTS Receiver for animeo® IP provides communication between building management systems and SDN motorized shading systems.

1871498

Controls

DecoFlex Digital Keypads (RS485)



Stand-alone SDN

SDN Group Keypads

animeo® IP




6 Button
White: 1871479
Black: 1871495



8 Button
White: 1871472
Black: 1871494



6 Button
White: 1871497



8 Button
White: 1871496



6 Button
White: 1871493
Black: 1871492



8 Button
White: 1871491
Black: 1871490

NOTE: Custom button ordering form available at www.somfypro.com/decoflex-custom-button
Visit tools page for software to configure keypads, www.somfypro.com/services-support/software

animeo® IP



animeo® IP is a total solar management system utilizing Somfy-powered intelligent motorized window coverings as well as digital keypads and weather sensors. The system's controllers, sensors and keypads can be added to both new and existing Somfy Digital Network installations for comprehensive solar management as either a stand-alone solution or integrated into third-party control systems. An intuitive user interface allows for simplified commissioning, building management and technical support, featuring drag-and-drop programming, motor auto discovery and at-a glance system status update.



animeo® IP Building Controller
1822314

animeo® IP Sub-Controller
1860201

Controls

Radio Technology Somfy® (RTS)



Situo & Telis Collections



Situo® 1 RTS
Pure Single
Channel Remote
1870571



Situo® 5 RTS
Pure Five
Channel Remote
1870575



Situo® 5 RTS
Soliris Five
Channel Remote
1870579



Situo® 5 RTS
Variation Five
Channel Remote
1811612



Telis 1 RTS Patio
Single Channel
Remote
1810643



Telis 4 RTS Patio
Five Channel
Remote
1810645



Telis 16 Channel RTS
Pure Remote with
On-screen display
1811081



Telis 16 Channel RTS
Silver Remote with
On-screen display
1811082



Telis 1 Chronis RTS
Pure Timer with
On-screen display
1805237

DecoFlex WireFree™ Wall Switches



DecoFlex 1
Channel RTS
WireFree™ Wall Switch
White
1810897
Black
1810899



DecoFlex 2
Channel RTS
WireFree™ Wall Switch
White
1811068
Black
1811067



DecoFlex 3
Channel RTS
WireFree™ Wall Switch
White
1811071
Black
1811070



DecoFlex 4
Channel RTS
WireFree™ Wall Switch
White
1811074
Black
1811073



DecoFlex 5
Channel RTS
WireFree™ Wall Switch
White
1810813
Black
1810830



DecoFlex WireFree™
3-Button
White
1870908



DecoFlex WireFree™
Surface 5 Channel
White
1871025

- Wall Switches shown in white. Black finish is also available.
- Switches are shown assembled with printed channel buttons.
- Custom engraved buttons are also available.



- Wall Switches are only available in white.

NOTE: For additional information regarding RTS controls, contact Somfy Systems, Inc.

Controls

Radio Technology Somfy® (RTS)



Table Top Accessories



DecoFlex WireFree™
RTS Table Top
Accessory
Black
1811051*



DecoFlex WireFree™
RTS Table Top
Accessory
Silver
1810972*



DecoFlex WireFree™
RTS Table Top
Accessory
White
1811185*



Smoove® 1 RTS Pure II
1871361

- Battery-operated convenience
- Surface mounts with ease
- Frames available in 3 colors



Smoove® 4 RTS Pure II
1871381



*DecoFlex Switch is sold separately from Table Top Accessory.

TaHoma® switch



TaHoma® switch
1871037

TaHoma® switch
(with ethernet adaptor)
1871038



TaHoma® switch
Ethernet Adaptor
9028054

16 Channel RTS Interface



Universal RTS Interface 16-Channel
(converts IR, RS232, RS485 to RTS)
1810872

RTS Repeater



RTS Repeater
(extends RTS range)
1810791

Controls

Wired AC Controls & Switches



Decorator Toggle Switches (single pole, double throw) & Switchplates



Maintained
Toggle Switch (White)
1800381



Maintained
Toggle Switch (Ivory)
1800380



Momentary
Toggle Switch (White)
1800383



Momentary
Toggle Switch (Ivory)
1800382



Plastic Toggle
Switchplate (Ivory)
9011962

Decorator Paddle Switches & Switchplates



Maintained Paddle Switch
(White)
1800374



Maintained Paddle Switch
(Ivory)
1800373



Momentary Paddle Switch
(White)
1800378



Momentary Paddle Switch
(Ivory)
1800377



Maintained Double Pole,
Double Throw Paddle Switch
(White)
1800375



Single Gang Paddle Switchplate
(White)
9011967

5 Position Switch



5 Position AC Decorator
Rocker Switch with Tilting Control
(White)
1800388



Decorator Rocker Switch
Double Pole, Double Throw
Maintained (White)
1800341



Decorator Rocker Switch
Double Pole, Double Throw
Maintained (Ivory)
1800342



Decorator Rocker Switch
Double Pole, Double Throw
Momentary (White)
1800345

Rocker Switches

Decorator/Designer Paddle Switches



Decorator/Designer Paddle
Switch Single Pole Maintained
(White)
1800374



Decorator/Designer Paddle
Switch Single Pole Maintained
(Ivory)
1800373



Decorator/Designer Paddle
Switch Single Pole Momentary
(White)
1800378



Decorator/Designer Paddle
Switch Single Pole Momentary
(Ivory)
1800377



Decorator/Designer Switch
Maintained (Double Pole)
(Ivory)
1800376

Controls

Wired AC Controls & Switches



Individual Group Control (IGC) 4n1 Motor Controller



IGC 4N1 Motor Controller
1811416



IGC 4N1 RTS Radio Receiver
1811492



DecoFlex Dry Contact Keypad
1811402



IGC RTS Radio Receiver (Momentary)
1810481

IGC 4N1 Motor Controller Shutter Mode
1870902

Group Control System II (GCS II)



Group Control System II (GCS II)
1810476

Dry Contact

DRY CONTACT

RTS Dry Contact Interface

Outdoor Receivers

Eolis Sensor

Soliris Sensor



RTS Dry Contact Interface
Single Channel
1810493



Outdoor Lighting Receiver
1810875
Universal RTS Receiver
1810627



Eolis RTS Wind
Sensor 24V
9012499



Soliris RTS Sun and
Wind Sensor 24V
9012500